

McMahan Construction Co., Inc.

DEAN KELLOGG, *President*
#CGC1532692 and #CBC1259026

JOHN JUSTUS, JR., *Exec. Vice President*
#CGC059437 and #CUC057309

SHERRY PHILLIPS
Secretary-Treasurer

April 8, 2026

Kimley Horn, Inc.
1530 Cornerstone Boulevard
Building 1, Suite 200
Daytona Beach, Florida 32117
ATTN: Colten Brickler, P.E.


Re: Fisher WWTF Improvements-MLE Process, ITB No. 22046-change order proposal to relocate the 8" IR pumps to the EQ tank and replace them with 6" IR pumps

At your request, we have developed the following cost to relocate the 8" IR pumps to the EQ tank location and to furnish and install new 6" IR pumps using the existing control panel. A new 8" discharge line will be laid from the EQ pumps to the 10" line per the piping layout provided. Our scope of work is as follows:

- Furnish & install 6" Xylem pumps to replace the 8" IR pumps.
- Relocate the 8" pumps to the EQ tank location.
- Furnish & install new 8" flanged suction and discharge lines at the EQ tank area.
- Furnish & install new 6" check valves & 6" connections at the IR pump location.
- Electrical work includes connecting the new IR pumps to the existing panel and completing the electrical connections required to run the relocated 8" pumps at the EQ tank. EQ pump panel modifications by Hydra Services.
- Grassing and painting are not included in this pricing.
- Total cost for this work is: **\$260,000.00**

Attached is the proposal from Hydra Services to furnish the pumps & controls. Also attached is a sketch of the proposed piping layout. Upon review, please advise if this is approved and how you want to proceed. Contact us with any questions. Thanks.

Sincerely,
McMahan Construction Co., Inc.

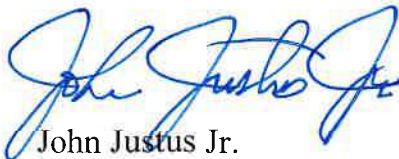

John Justus Jr.
Executive Vice President
Office #386-734-1071
Cell #386-214-1339