

**Deltona Blvd & Normandy Blvd**

FY 2023, IFB-604668-23/LNF - Term Contract for Traffic Signal Construction and System Communication Equipment


No.	Item	Description	Action	Quantity	Units	Unit Cost	Total Cost
13	630-2-11	Conduit, Underground	F/I	15	LF	\$ 27.89	\$418.35
17	630-2-12	Conduit, Directional Bore	F/I	5	LF	\$24.25	\$121.25
45	635-2-11	Pull & Junction Box, Ground Mounted w/ Apron	F/I	2	EA	\$2,076.33	\$4,152.66
85	647-G	Signal Technician (per hour)	F	20	HR	\$144.38	\$2,887.60
273	660-2A	AWG #14 loop lead-in cable	F/I	200	LF	\$2.10	\$420.00
266	660-2-102A	Loop assembly Type B (Maintenance loop only)	F/I	1		\$1,419.39	\$1,419.39
268	660-2-106A	Loop assembly Type F (Maintenance loop only)	F/I	4	AS	\$1,763.24	\$7,052.96
						<b>\$5,457.58</b>	<b>\$16,472.21</b>

Maintenance of Traffic (MOT) - 1%

Mobilization - 5%

\$164.72
\$823.61

Total: **\$17,460.54**

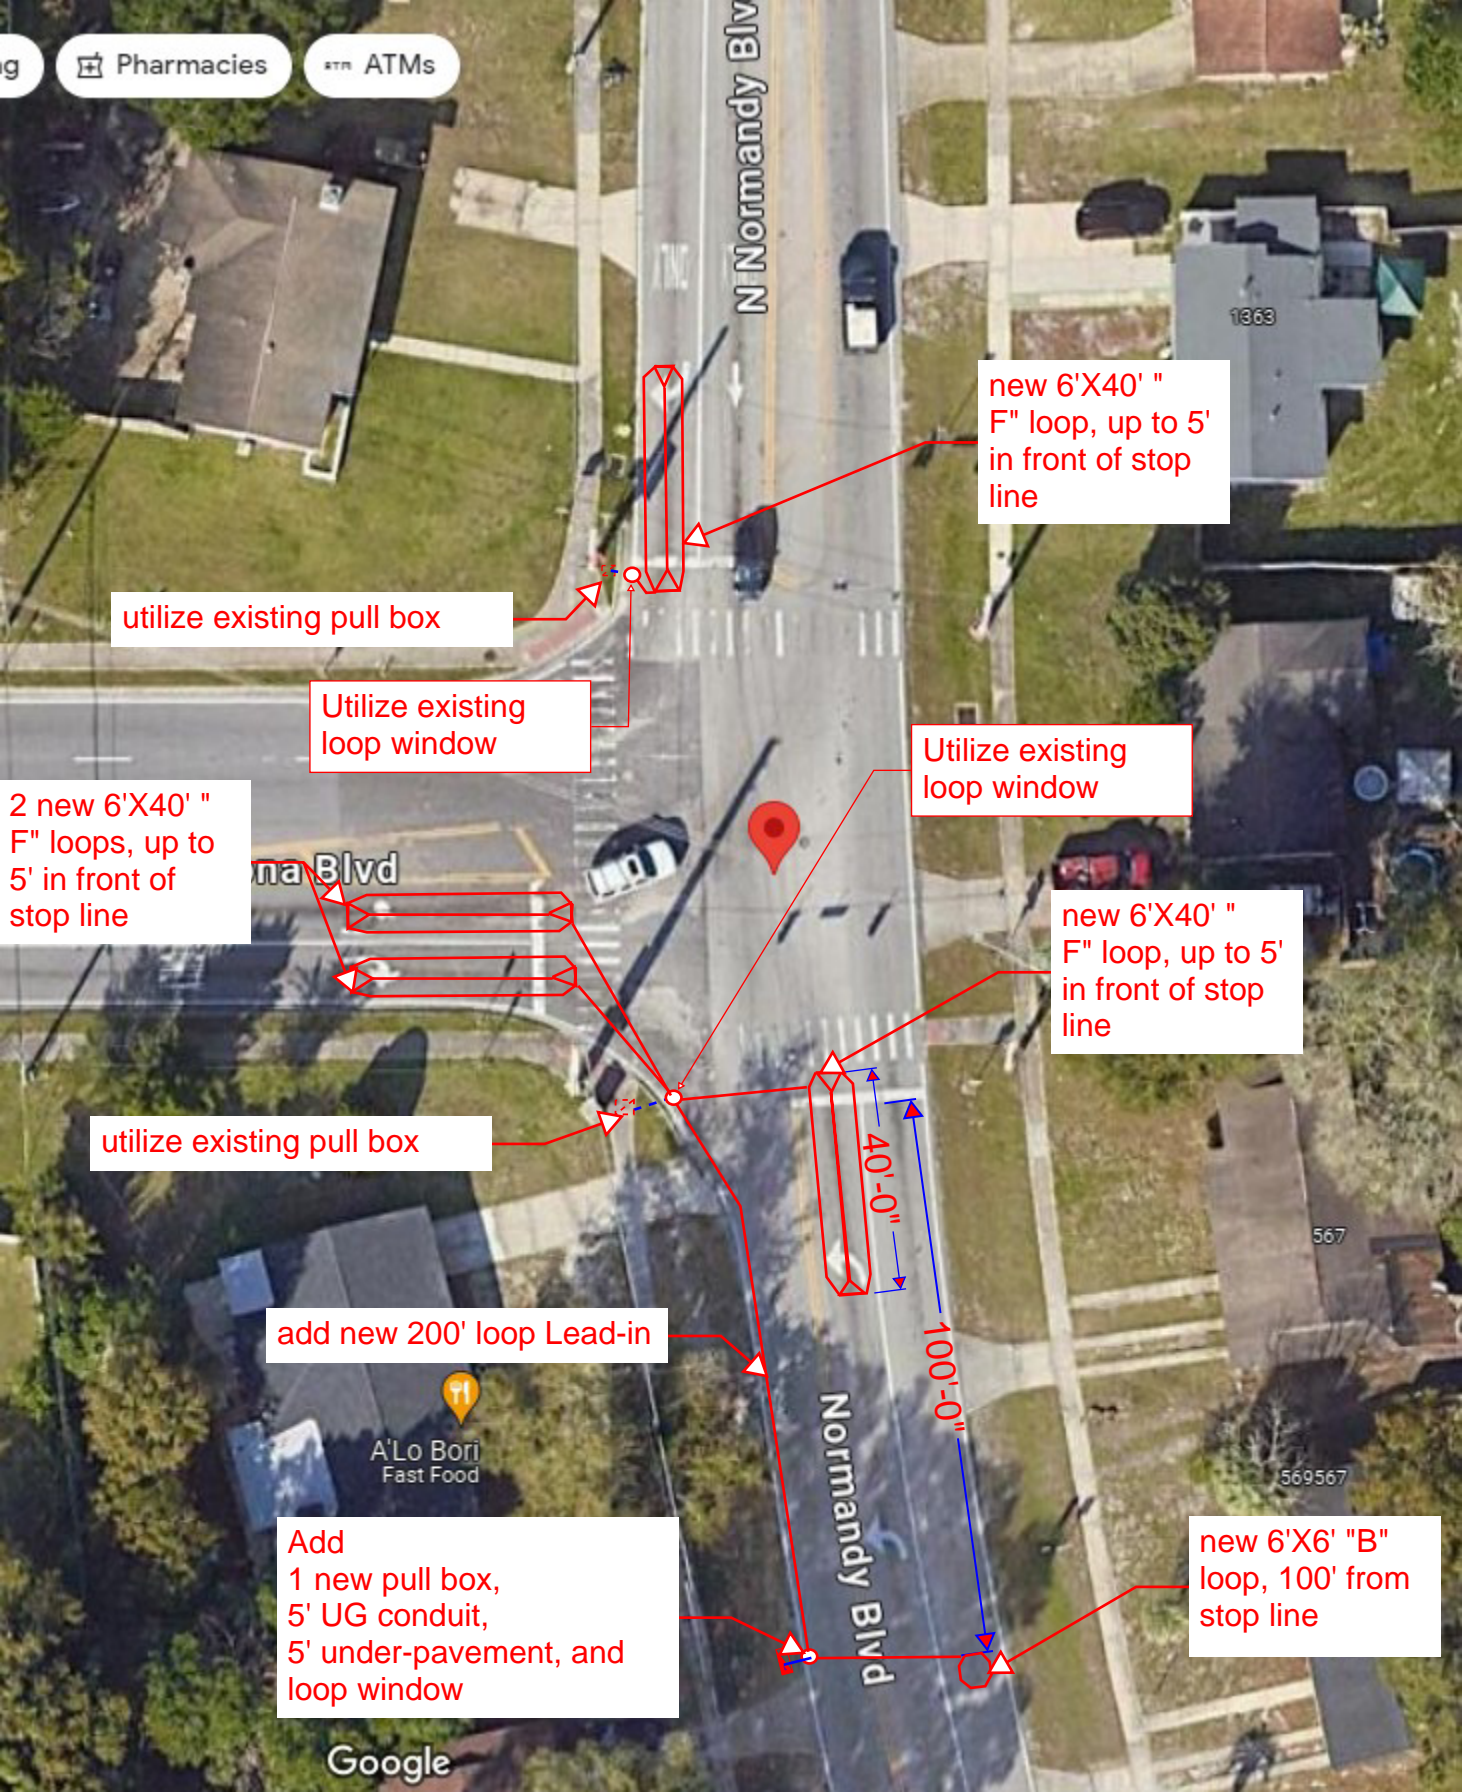

N Normandy Blv

1863

567

569567

A'Lo Borj  
Fast Food

ATMs

Pharmacies

new 6'X40' " F" loop, up to 5' in front of stop line

utilize existing pull box

Utilize existing loop window

Utilize existing loop window

2 new 6'X40' " F" loops, up to 5' in front of stop line

new 6'X40' " F" loop, up to 5' in front of stop line

utilize existing pull box

add new 200' loop Lead-in

Add  
1 new pull box,  
5' UG conduit,  
5' under-pavement, and  
loop window

new 6'X6' "B" loop, 100' from stop line

Normandy Blvd

Google