

Deltona Blvd & Normandy Blvd

FY 2023, IFB-604668-23/LNF - Term Contract for Traffic Signal Construction and System Communication Equipment

No.	Item	Description	Action	Quantity	Units	Unit Cost	Total Cost
13	630-2-11	Conduit, Underground	F/I	15	LF	\$ 27.89	\$418.35
17	630-2-12	Conduit, Directional Bore	F/I	5	LF	\$24.25	\$121.25
45	635-2-11	Pull & Junction Box, Ground Mounted w/ Apron	F/I	2	EA	\$2,076.33	\$4,152.66
85	647-G	Signal Technician (per hour)	F	20	HR	\$144.38	\$2,887.60
273	660-2A	AWG #14 loop lead-in cable	F/I	200	LF	\$2.10	\$420.00
266	660-2-102A	Loop assembly Type B (Maintenance loop only)	F/I	1		\$1,419.39	\$1,419.39
268	660-2-106A	Loop assembly Type F (Maintenance loop only)	F/I	4	AS	\$1,763.24	\$7,052.96
						\$5,457.58	\$16,472.21


Maintenance of Traffic (MOT) - 1%

\$164.72

Mobilization - 5%

\$823.61

Total: **\$17,460.54**

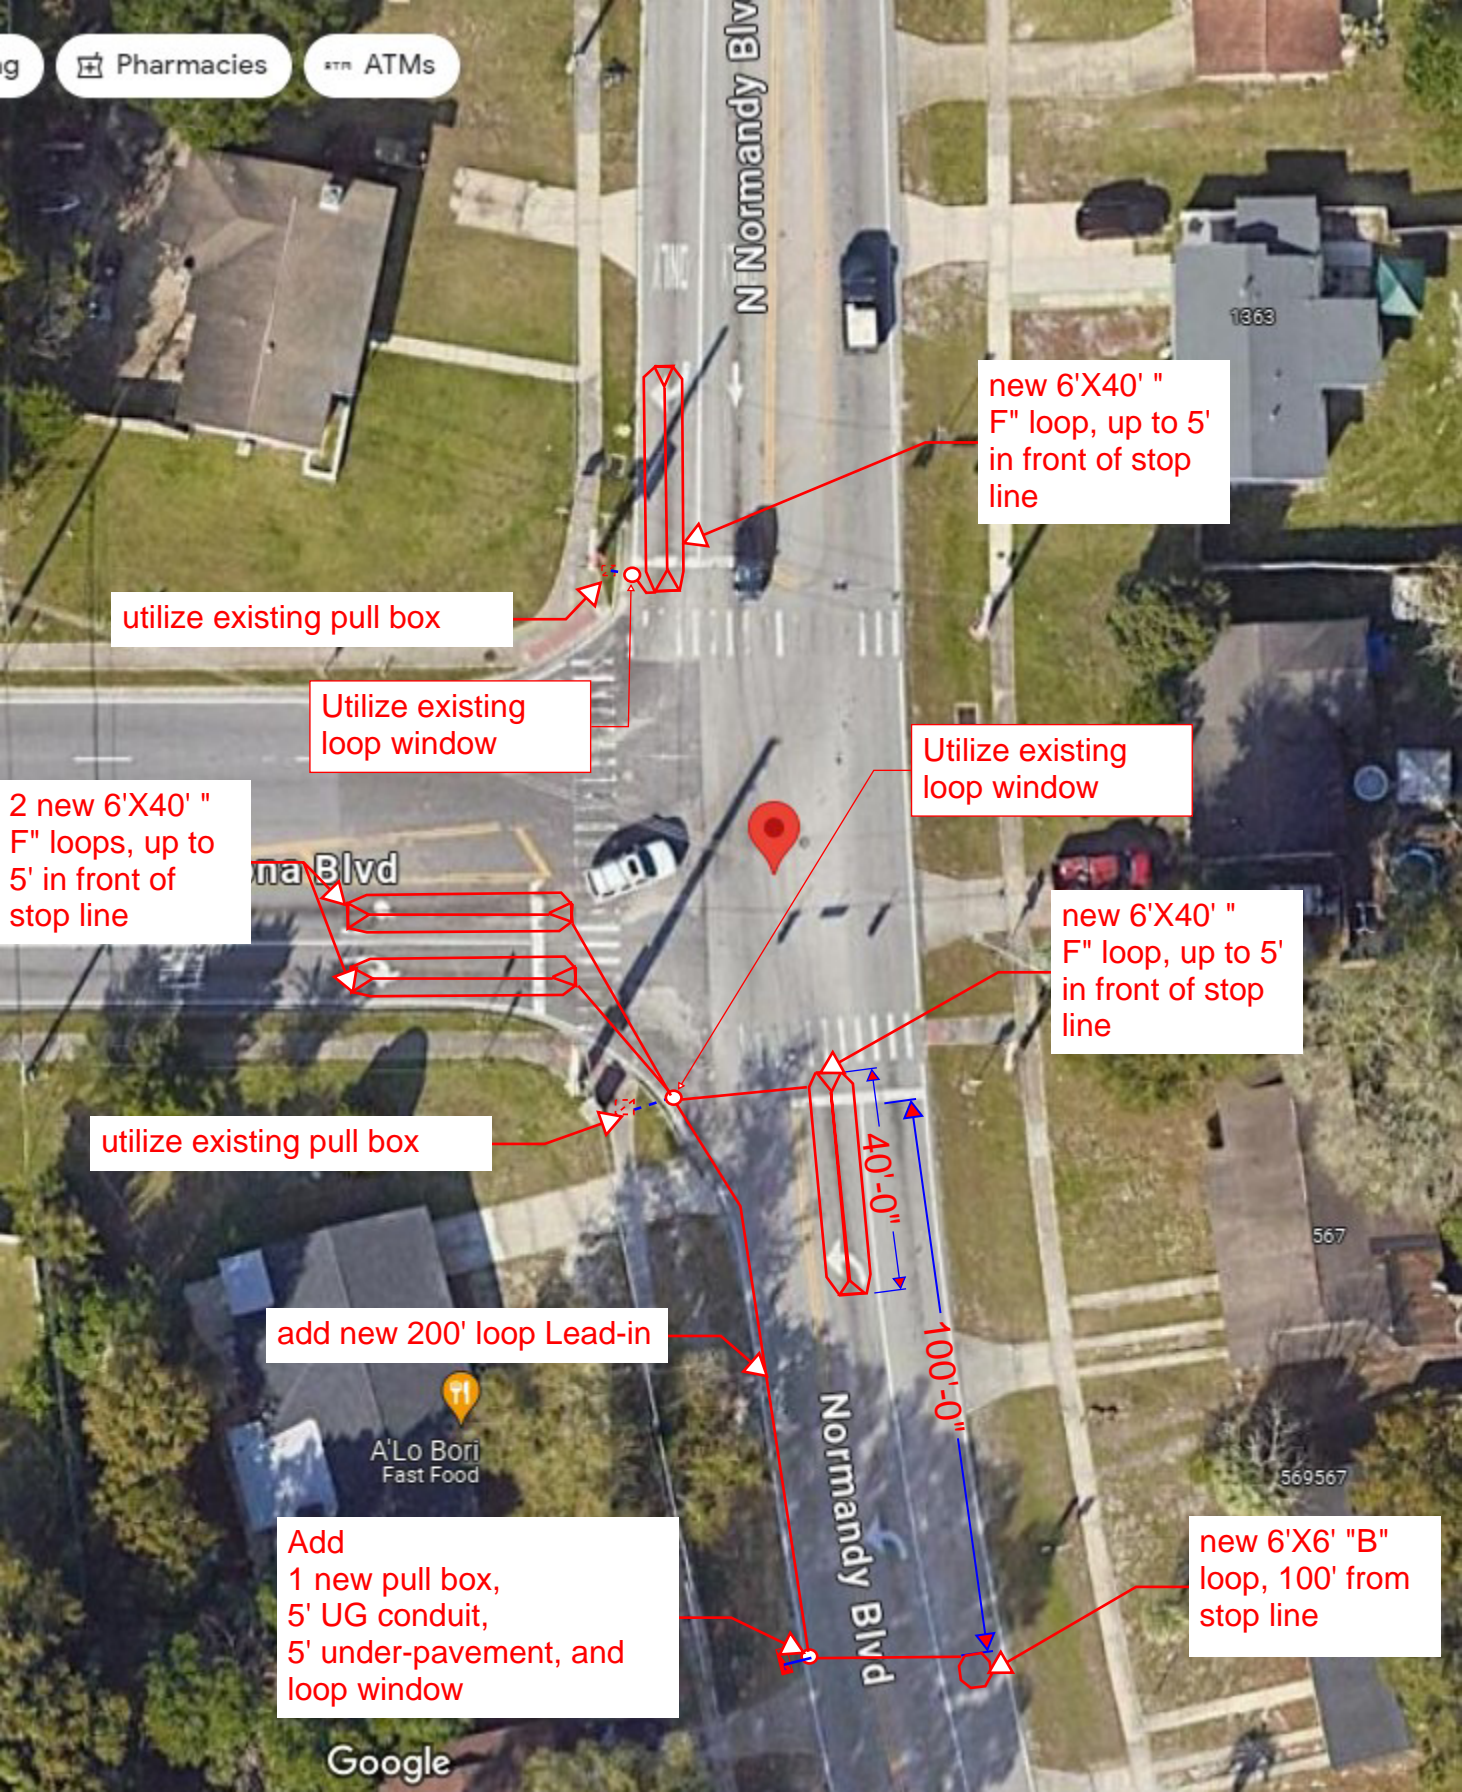

N Normandy Blvd

1863

new 6'X40' "F" loop, up to 5' in front of stop line

utilize existing pull box

Utilize existing loop window

Utilize existing loop window

2 new 6'X40' "F" loops, up to 5' in front of stop line

na Blvd

new 6'X40' "F" loop, up to 5' in front of stop line

utilize existing pull box

40'-0"

100'-0"

add new 200' loop Lead-in

A'Lo Bori
Fast Food

567

569567

Add
1 new pull box,
5' UG conduit,
5' under-pavement, and
loop window

new 6'X6' "B" loop, 100' from stop line

Normandy Blvd

Google